

Kemlan The Choice is Clear



Tempo LE No. 3. Side panels, double rear heat shield.

Tempo LE

A wood fired slow combustion space heater designed for homes up to 140 m² (15 squares)

Tempo LE Slow Combustion Space Heater

The Tempo LE was designed by Kemlan as a modern, efficient replacement for the pot belly stove. The Tempo LE uses the same 115mm (4.5") flue as most pot belly stoves and is designed to heat an area up to 140 sq. m (15 squares).

ROBUST • 6mm welded steel firebox • Firebrick lined floor • Heavy duty hinges and catches • Stainless steel glass holder

SIMPLE • One easy slide control • No levers, rods or dampers • Easy to light • Steady controllable heat • Removable heavy baffle plate

SAFE • Rear shielded firebox • Ceramic glass door • Tested to Australian Standards AS/NZS 2918 for safety clearances (refer specifications) • The Tempo LE complies with the requirements if AS/NZS 4103 for emissions

EFFICIENT • Useable cooktop • Preheated air supply to fire • Low emissions • High output • Combined radiant and convection heater

LONG LASTING • Kemlan is an all Australian company noted for the production of quality products backed by an unsurpassed record of after sales services since 1969. From the outset, the founders built their fireplaces to work and last. The Tempo LE is the result of continuous research and development and maintains the Kemlan tradition • **10 year limited warranty**



Tempo LE No 1. Pot Belly Replacement (PBR). Rear heat shield.




Tempo LE No 3. Side panels, double rear heat shield.

SPECIFICATIONS


Tempo LE No 1. (Pot Belly Replacements)

- Clearances to combustible materials
- Rear Wall:** 225mm
- Side Wall:** 575mm
- Corner Wall:** 350mm
- Clearance to rear wall as shown is with one 900mm length of flue shield fitted
- **Hearth:** As for Tempo LE No 3
- Weight 84kgs

Tempo LE No 1.

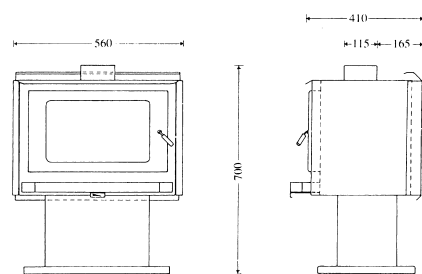

Tempo LE No 3.

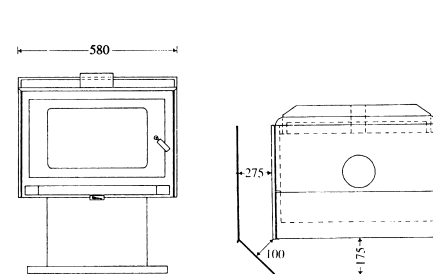

Due to continuing research and development specifications may change without notice.

SPECIFICATIONS

Tempo LE No 3.

- Clearances to rear wall as shown is with one 900mm length of flue shield fitted
- Without flue shield clearance should be 285mm
- **Hearth:** Thickness to be a minimum of 14mm non-combustible material and must extend 300mm in front of the firebox door and 200mm to the sides
- Minimum hearth requirements:
- Standard Hearth:** 950mm x 950mm
- Corner Hearth:** 1050mm x 1050mm with a 600mm front edge
- Weight 92 kgs

Your Local Retail Outlet:



Kemlan Industries Pty Ltd ABN 43 003 209 961
Specialists in Fireplace Design and Manufacture

Head Office:

59 Pineapple Street Zillmere QLD
PO Box 259 Zillmere QLD 4034 Australia

Telephone: (07) 3263 8488 Facsimile: (07) 3263 6452
www.kemlan.com

Kemlan is a subsidiary of Jetmaster Fireplaces Australia P/L.